


SYM	REVISION	BY	DATE	ECN
A	ENGINEERING RELEASE	JC	7-10-92	17181

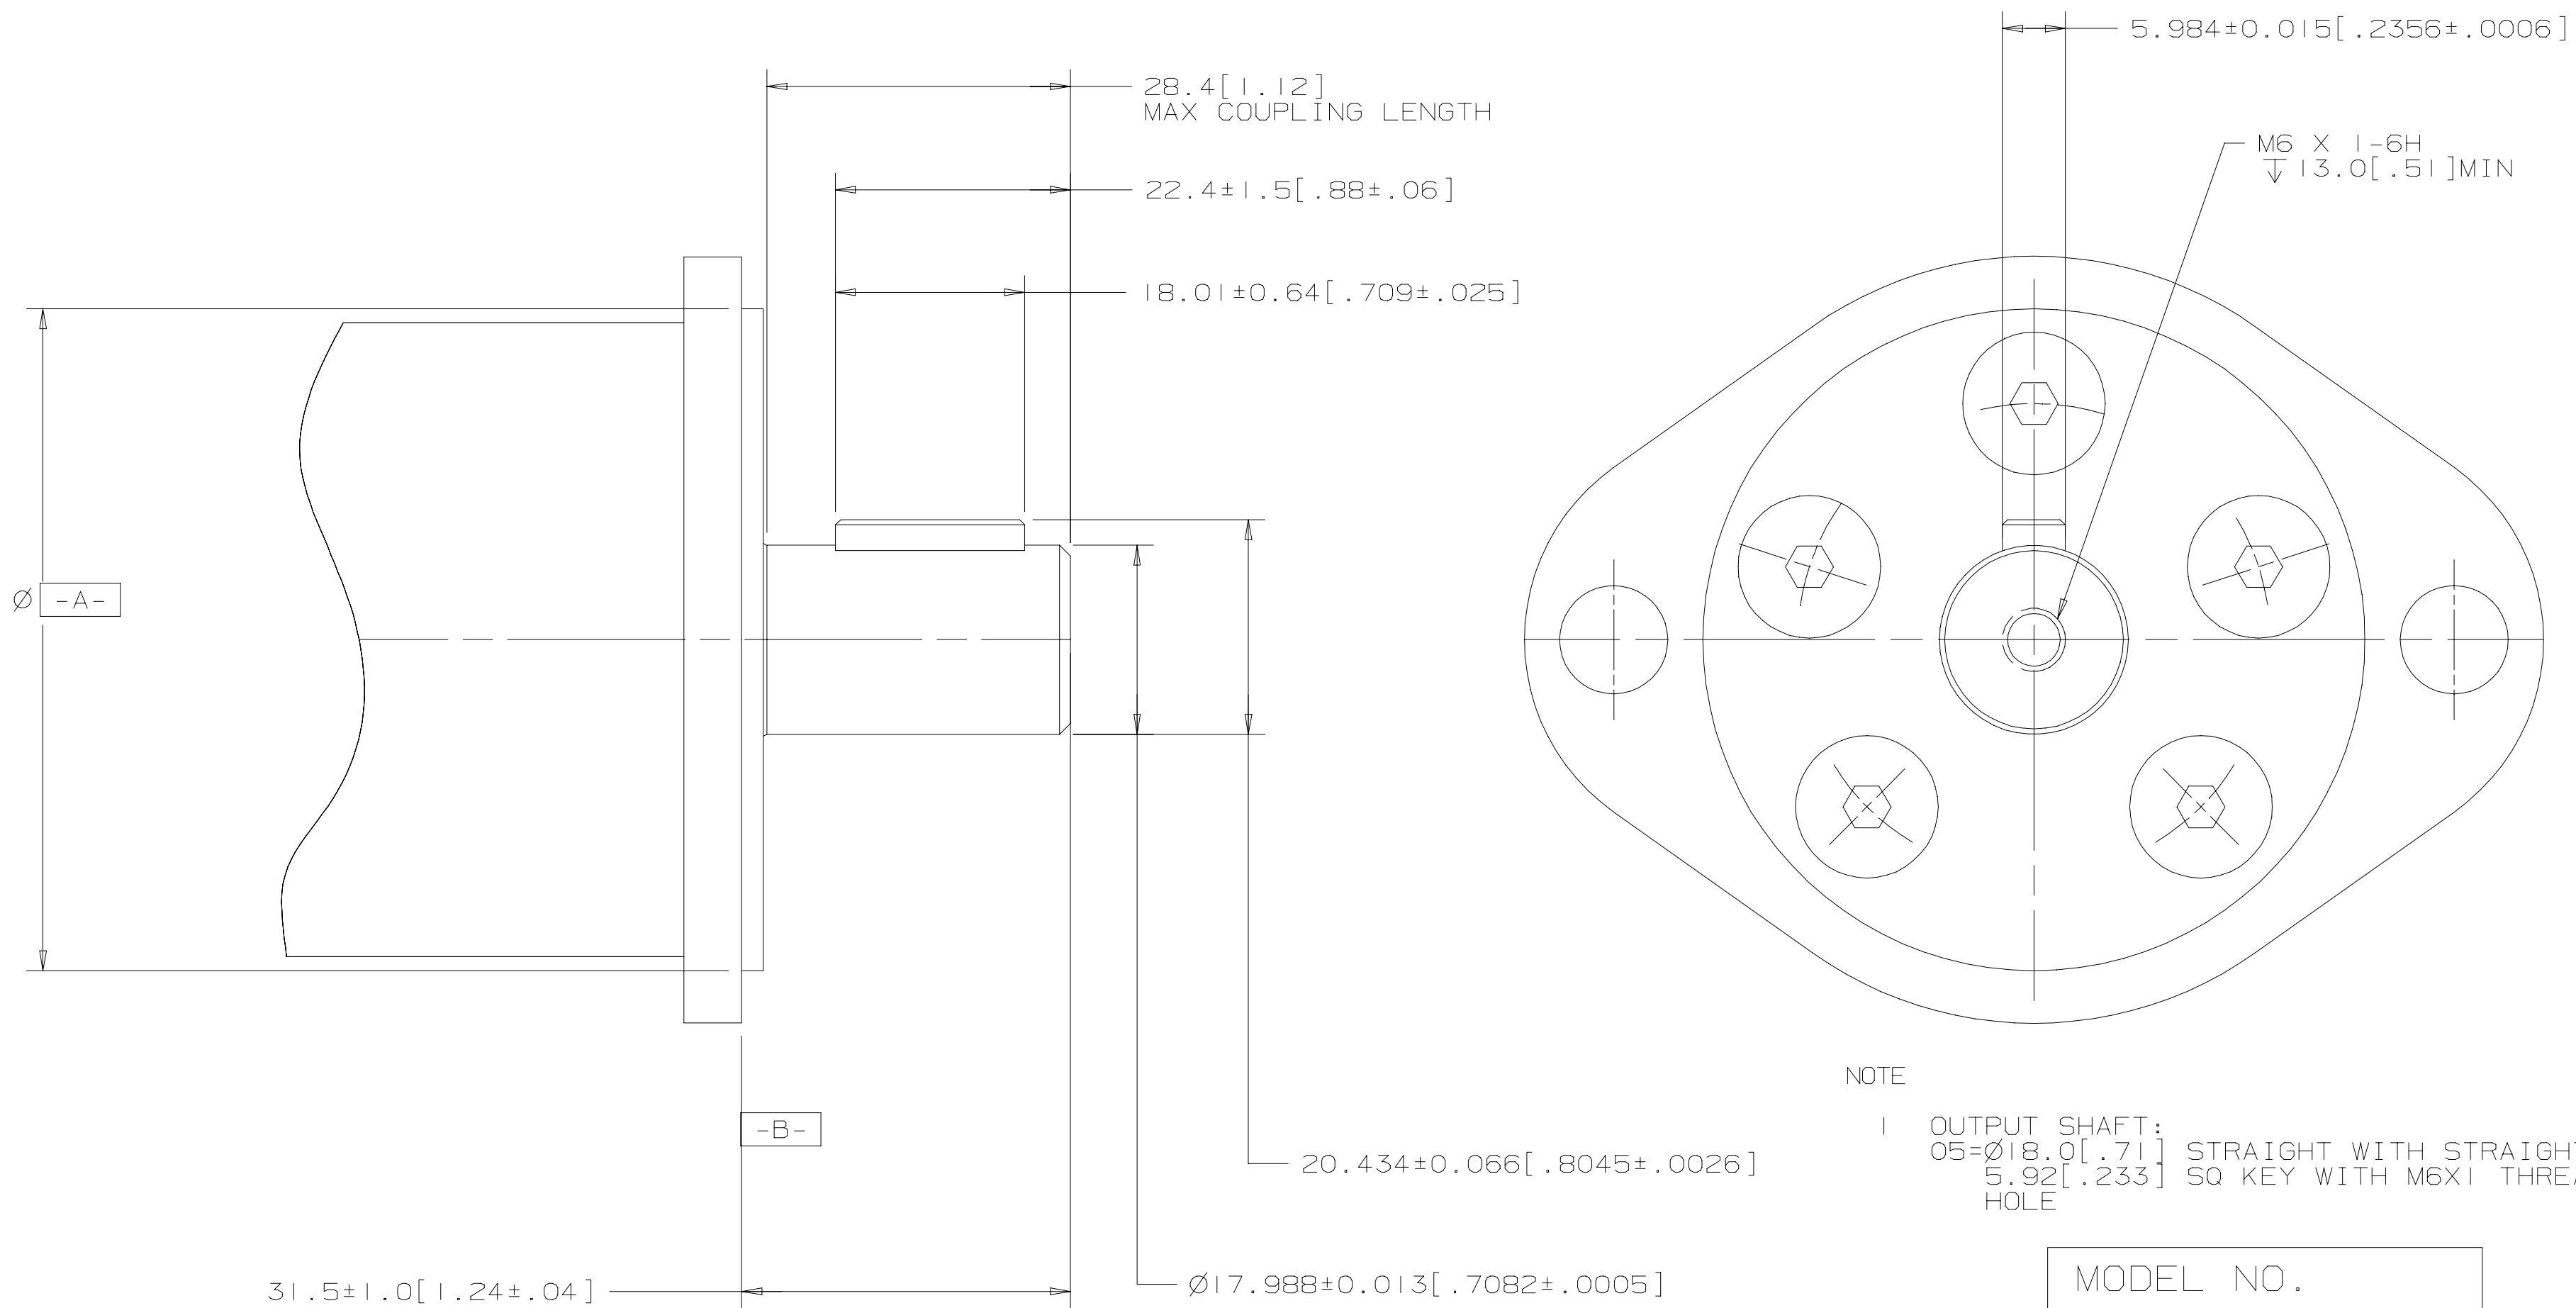

NOTE
 1 OUTPUT SHAFT:
 05=Ø18.0 [.71] STRAIGHT WITH STRAIGHT
 5.92 [.233] SQ KEY WITH M6X1 THREADED
 HOLE

MODEL NO.
 MOJXXX05XXXX

	Ø 0.25 [.010]	A
	0.08 [.003]	B

MRG

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES <input type="checkbox"/> MILLIMETERS <input checked="" type="checkbox"/> [INCHES]	DRAWING BASED ON ANSI Y14.5M-1982	
	THE REPRODUCTION, DISTRIBUTION, AND UTILIZATION OF THIS DOCUMENT, AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPLICIT AUTHORIZATION IS PROHIBITED. OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHTS RESERVED IN THE EVENT OF THE GRANT OF A PATENT, UTILITY MODEL, OR DESIGN. (PER ISO 16016)	
TOLERANCES .X ± .XX ± .XXX ± <	DRAWN BY/DATE JC 7-3-92 CHECKED BY/DATE	MATERIAL/HEAT TREAT
UNSPECIFIED RADII ARE	ENGRG BY/DATE METALLURGY BY/DATE	TITLE SHAFT INSTALLATION J MOTOR
UNSPECIFIED DRAFT ANGLES ARE	 THIRD ANGLE PROJECTION	MICROINCHES <input checked="" type="checkbox"/> MICROMETERS [MICROINCHES] <input type="checkbox"/> NUMBER A-270-013
DRAWING FORMAT CADD <input checked="" type="checkbox"/> MANUAL <input type="checkbox"/>	DO NOT SCALE	ARITHMETICAL AVERAGE SCALE 2/1 SHEET 1 OF 1

