DISPL CODE	G MAX	
022	128.8	[5.07]
030	131.3	[5.17]
040	134.4	[5.29]
049	136.9	[5.39]
062	141.0	[5.55]
080	146.3	[5.76]
096	151.1	[5.95]
119	158.0	[6.22]
149	166.9	[6.57]
187	178.3	[7.02]
226	190.0	[7.48]

REV	DESCRIPTION	BY	CHK	DATE	ECN
A	ENGINEERING RELEASE	RAF		7-7-94	25755
B	-1)(2C) 88.9 [3.50] MAX WAS 84.6 [3.33] MAX -2)(2C) ø 91.9 [3.62] MAX WAS ø 88.6 [3.49] MAX	JMM		10-26-94	26147
C	-1)(4B) WAS 177.1 [6.97] MAX. -2)(1D) WAS 122.2 [4.81] MAX.	AAK		4-7-04	46856
D	-1)(4D)UPDATED TABLE FOR DISPL CODE -2)(4A)NOTE 2 MOUNTING FLANGE WAS "H"	PM		03-27-07	0004355
E	(4A) NOTE 3 WAS CASE DRAIN : 1....	SSP	SB	12-26-15	0068068_1

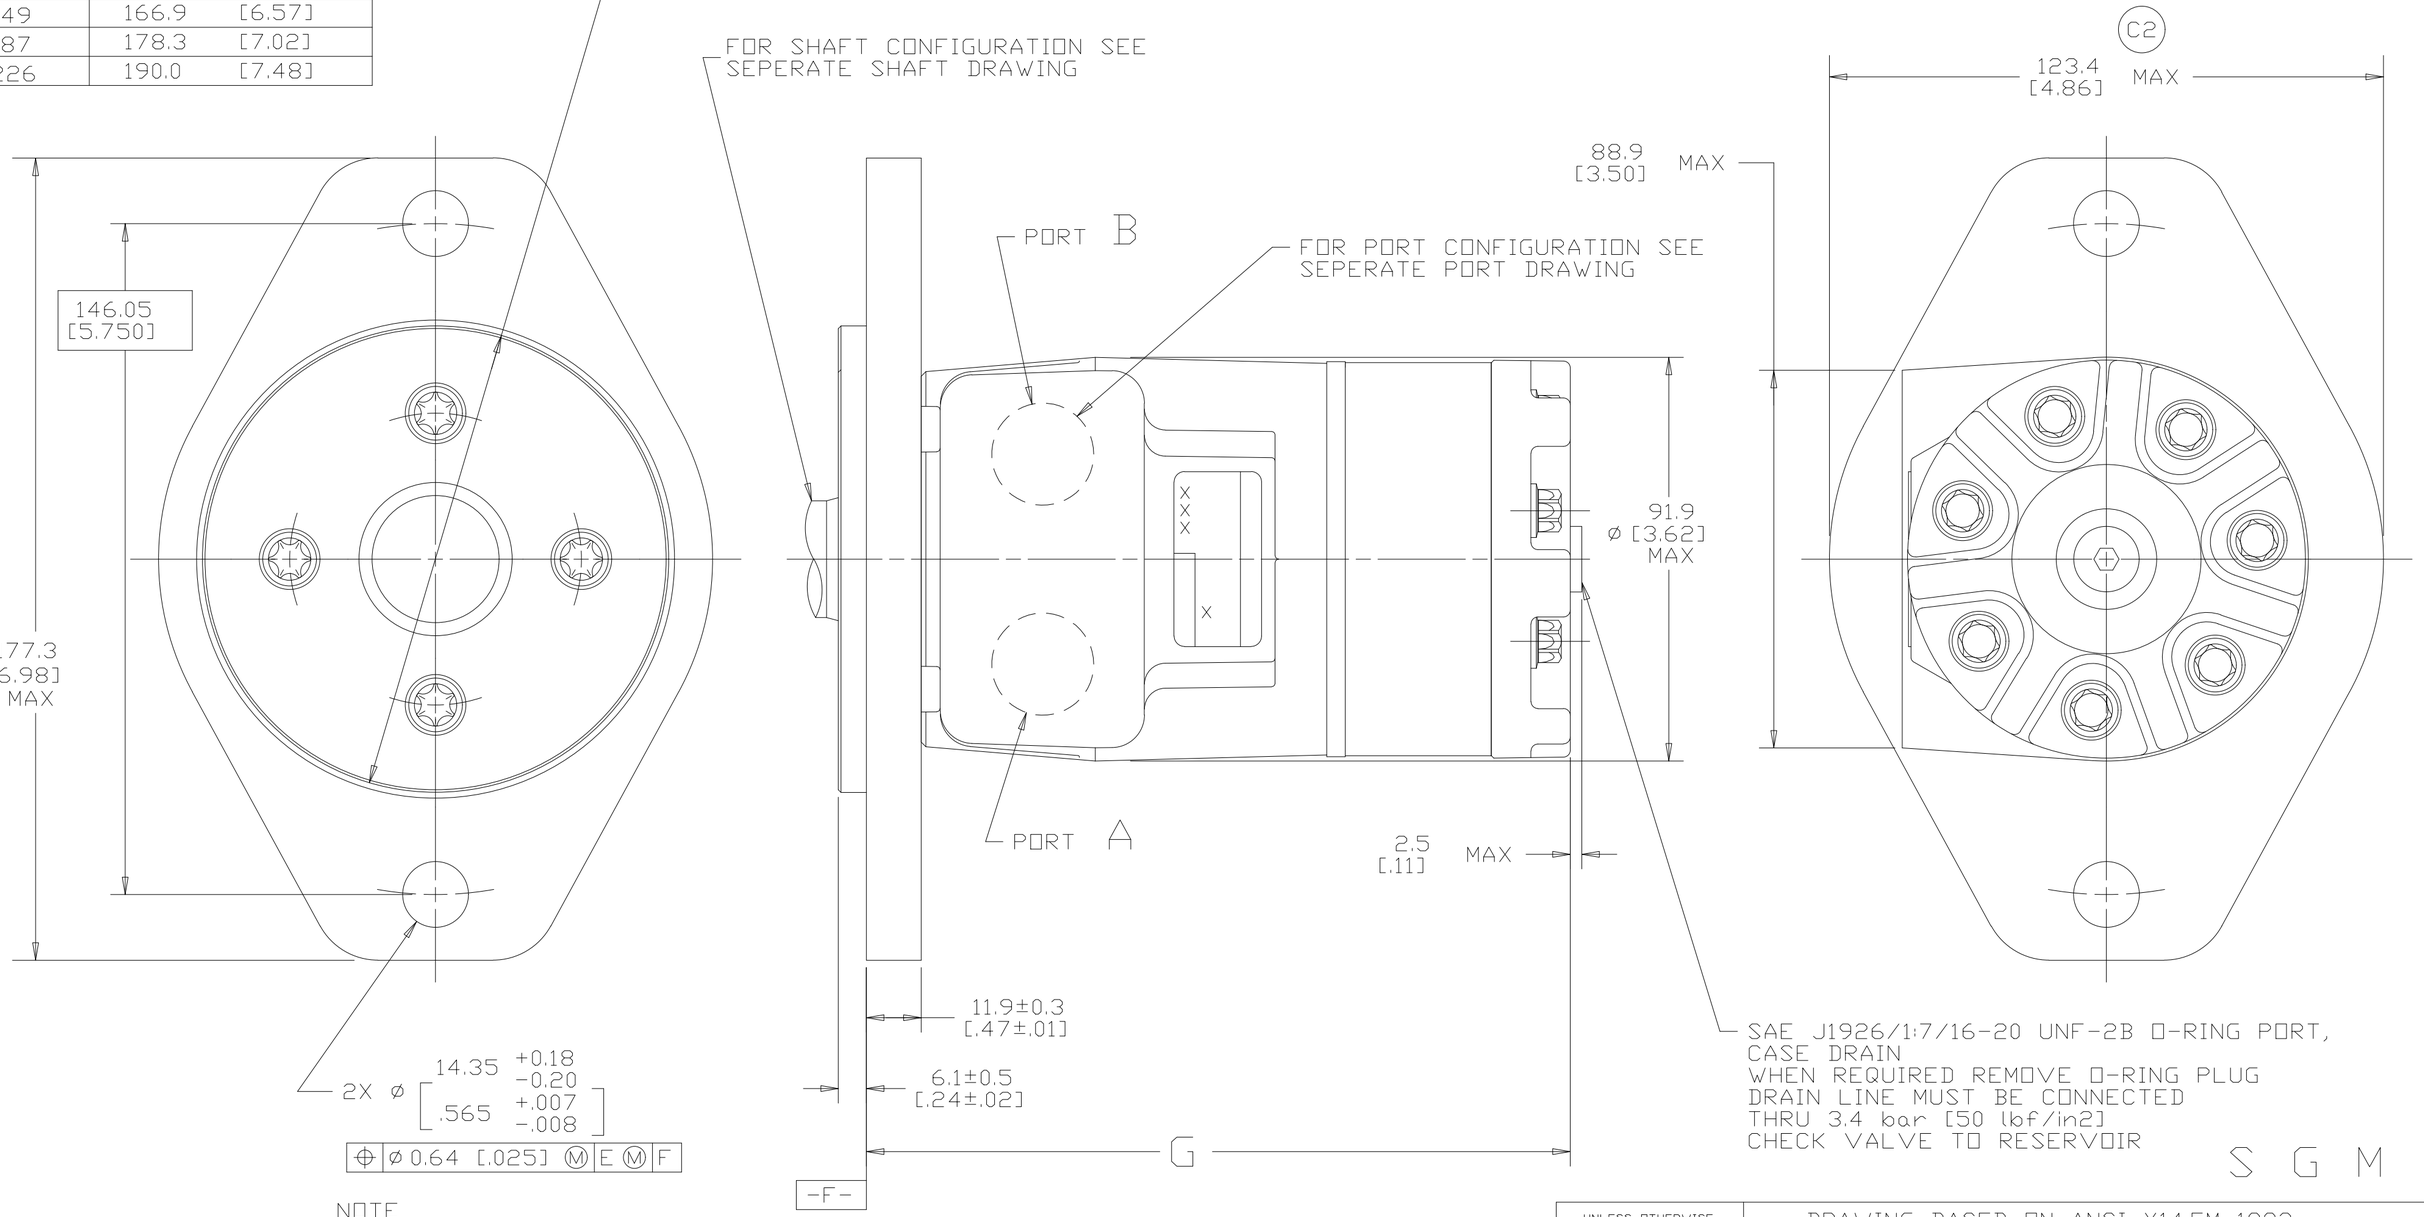

NOTE

1 ROTATION
STANDARD WHEN FACING SHAFT END OF MOTOR SHAFT TO ROTATE CLOCKWISE WHEN PORT "A" IS PRESSURIZED COUNTERCLOCKWISE WHEN PORT "B" IS PRESSURIZED

REVERSE WHEN FACING SHAFT END OF MOTOR SHAFT TO ROTATE CLOCKWISE WHEN PORT "B" IS PRESSURIZED COUNTERCLOCKWISE WHEN PORT "A" IS PRESSURIZED

2 MOUNTING FLANGE
DD = STANDARD, 2 BOLT: ø 101.6 [4.00] X 6.1 [.24] PILOT ø 14.35 [.565] HOLES ON ø 146.0 [5.75] BOLT CIRCLE (SAE B)

3 CASE DRAIN
01 = 7/16-20 (END CAP)

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN
INCHES ☐
MILLIMETERS [INCHES] ☒

TOLERANCES
.X ± ----
.XX ± ----
.XXX ± ----
∠ ±----

UNSPECIFIED RADII ARE ----

UNSPECIFIED DRAFT ANGLES ARE ----

DRAWING FORMAT CADD ☒ MANUAL ☐

DRAWING BASED ON ANSI Y14.5M-1982

THE REPRODUCTION, DISTRIBUTION AND UTILIZATION OF THIS DOCUMENT AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHER WITHOUT EXPLICIT AUTHORIZATION IS PROHIBITED. OFFENDERS WELL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHT RESERVED IN THE EVENT OF THE GRANT OF A PATENT, UTILITY MODEL OR DESIGN. (PER ISO 16016)

DRAWN BY/DATE RAF 7/11/94
CHECKED BY/DATE AGJ 7-14-94
ENGRG BY/DATE RVA 7-14-94
METALLURGY BY/DATE ----

MATERIAL/HEAT TREAT

TITLE
T MOTOR INSTALLATION

THIRD ANGLE PROJECTION

DO NOT SCALE

MICROINCHES ☐
MICROMETERS [MICROINCHES] ☐
ARITHMETICAL AVERAGE ✓

NUMBER
A-821-030

SCALE 1/1

SHEET 1 OF 1