


REV	DESCRIPTION	BY	CHK	DATE	ECN / MPS
A	ENGINEERING RELEASE	LMD	LMD	11-2-05	M65869

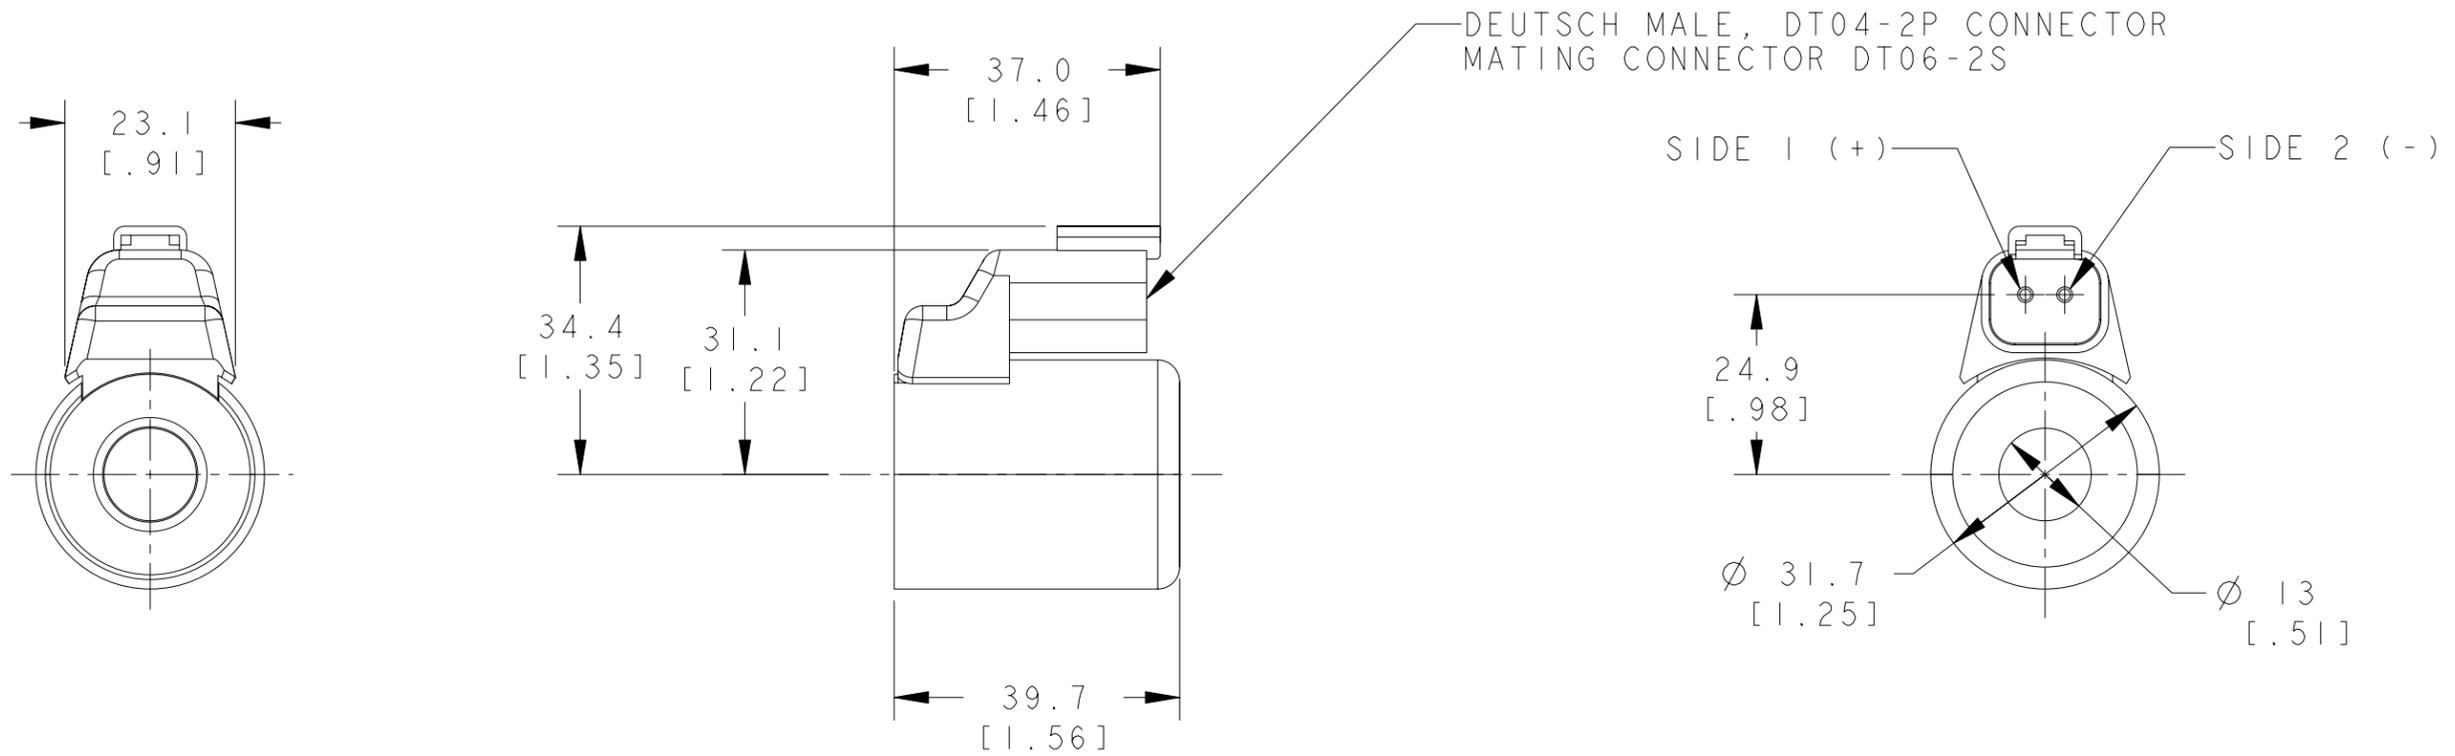

MC
DISTRIBUTION CODE(S)

NOTE

- 1 COIL ENCAPSULANT: GLASS FILLED NYLON
- 2 MAGNET WIRE: UL CLASS N 200°C [392°F]
- 3 VOLTAGE: 12 VDC
- 4 RESISTANCE: 7.0 OHMS
- 5 POWER RATING: 20.5 WATTS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES <input type="checkbox"/> MILLIMETERS (INCHES) <input checked="" type="checkbox"/>	DRAWING BASED ON ANSI Y14.5M-1982	
	THE REPRODUCTION, DISTRIBUTION, AND UTILIZATION OF THIS DOCUMENT, AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPLICIT AUTHORIZATION IS PROHIBITED. OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHTS RESERVED IN THE EVENT OF THE GRANT OF A PATENT, UTILITY MODEL, OR DESIGN. (PER ISO 16016)	
TOLERANCES .X ± ---- .XX ± ---- .XXX ± ---- ∠ ± ----	DRAWN LMD BY/DATE 11-8-05	MATERIAL/HEAT TREAT
	CHECKED LMD BY/DATE 11-8-05	
UNSPECIFIED RADII ARE: ----	ENGRG CML BY/DATE 11-9-05	TITLE SOLENOID COIL, SIZE 8 INSTALLATION DEUTSCH MALE, DT04-2P
UNSPECIFIED DRAFT ANGLES ARE: -----°	METALLURGY BY/DATE ----	
B SIZE	THIRD ANGLE PROJECTION DO NOT SCALE	MICROINCHES <input checked="" type="checkbox"/> MICROMETERS (MICROINCHES) <input type="checkbox"/> ARITHMETICAL AVERAGE <input checked="" type="checkbox"/>
		NUMBER 300AA00024A SCALE 1/1 SHEET 1 OF 1

