


PART NUMBER	I.D. (REF) mm [in]	O.D. (MAX) mm [in]	OPERATING PRESSURE bar [psi]	MIN. BURST PRESSURE bar [psi]	MIN. BEND RADIUS mm [in]	WEIGHT kg/m [lbs/ft]
B-4	4.8 [.19]	8.6 [.34]	86 [1250]	344 [5000]	38.1 [1.50]	0.12 [.08]
B-5	6.4 [.25]	10.2 [.40]	77 [1125]	310 [4500]	50.8 [2.00]	0.13 [.09]
B-6	7.9 [.31]	11.7 [.46]	72 [1050]	289 [4200]	88.9 [3.50]	0.18 [.12]
B-8	10.4 [.41]	14.7 [.58]	68 [1000]	275 [4000]	114.3 [4.50]	0.25 [.17]
B-10	12.7 [.50]	17.3 [.68]	62 [900]	248 [3600]	127 [5.00]	0.31 [.21]
B-12	15.7 [.62]	20.3 [.80]	51 [750]	206 [3000]	152.4 [6.00]	0.40 [.27]
B-16	22.4 [.88]	27.2 [1.07]	43 [625]	172 [2500]	228.6 [9.00]	0.63 [.43]

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	1) NOTE #4 TEMPERATURE WAS -54°C TO +230°C [-65°F TO +450°F]	2003-12-09	EN-F25540 DP-1511
		DS/W.R.H.	

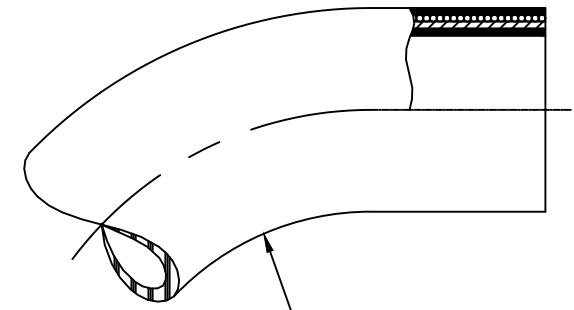

MIN. BEND RADIUS

METRIC

5. ALL HOSE ATTRIBUTES ARE METRIC [ENGLISH].
4. TEMPERATURE RANGE -54°C TO +204°C [-65°F TO +400°F]. A
1
3. IDENTIFICATION: (a) ONE BRONZE BRAID.
(b) WHITE TUBE STOCK
2. APPLICATION: IDEAL FOR STEAM, COMPRESSOR DISCHARGE AND VIRTUALLY ALL CHEMICAL APPLICATIONS.
NOT RECOMMENDED FOR STEAM-COLD WATER CYCLING.
1. CONSTRUCTION: EXTRUDED PTFE INNER TUBE WITH FULL COVERAGE OF A SINGLE BRONZE BRAID.

DRAWN D.Snyder	FLUID CONVEYANCE DIVISION		
CHECKED W.R.HYDE			
APPROVED W.R.HYDE	DRAWING TITLE EVERFLEX HOSE SMOOTH BORE "B" SERIES BRONZE WIRE BRAID		
RELEASE DATE 2003-05-16	SIZE A3	DRAWING NUMBER B	REV A
EN-F25540	THIRD ANGLE PROJECTION		
DP-1511	SCALE NONE	DIST U	CAGE CODE 01276
	SHEET 1 OF 2		
THE REPRODUCTION, DISTRIBUTION AND UTILIZATION OF THIS DOCUMENT AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPLICIT AUTHORIZATION IS PROHIBITED. OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHT RESERVED IN THE EVENT OF THE GRANT OF A PATENT, UTILITY MODEL OR DESIGN. (PER ISO 16016)			