
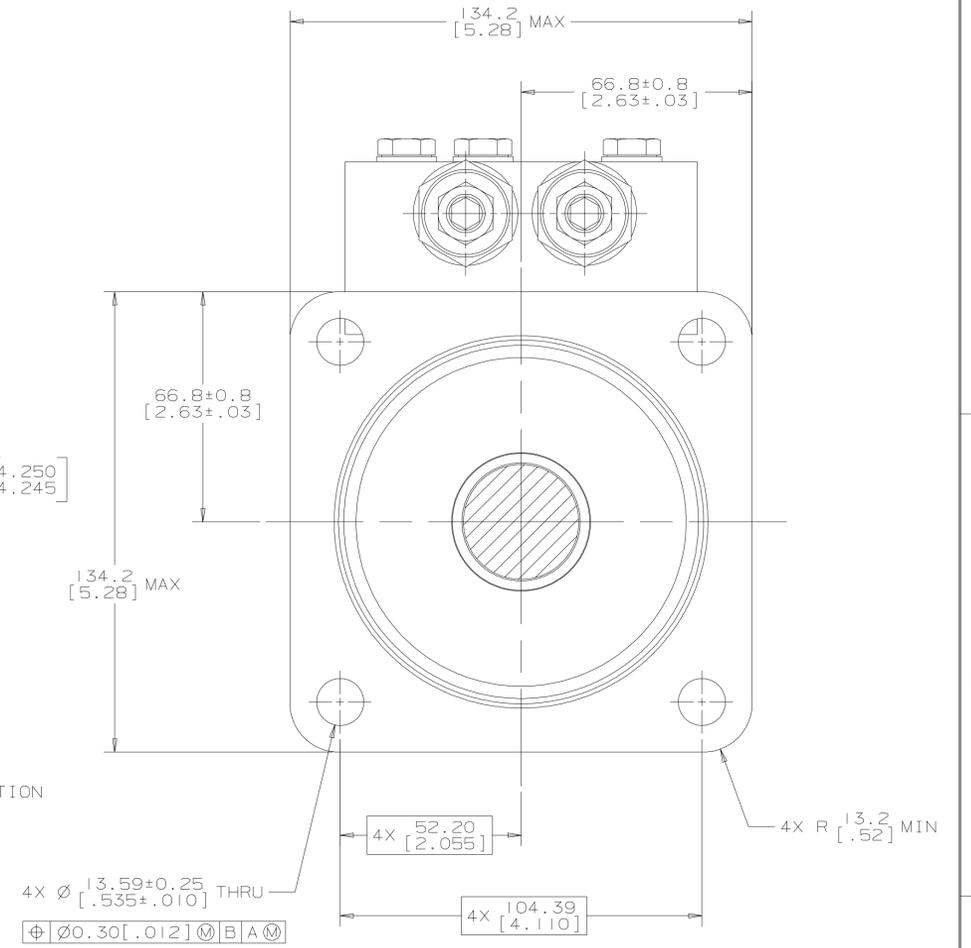
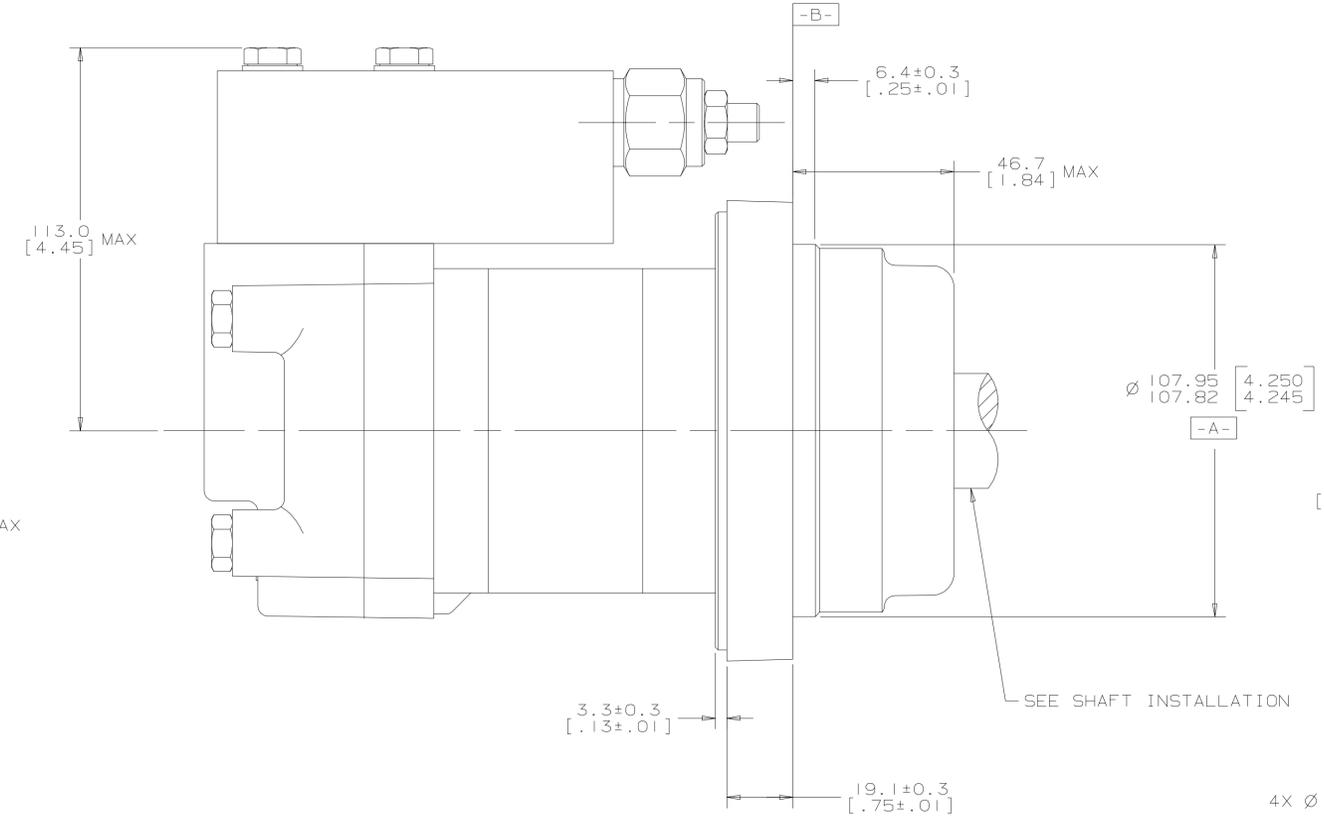
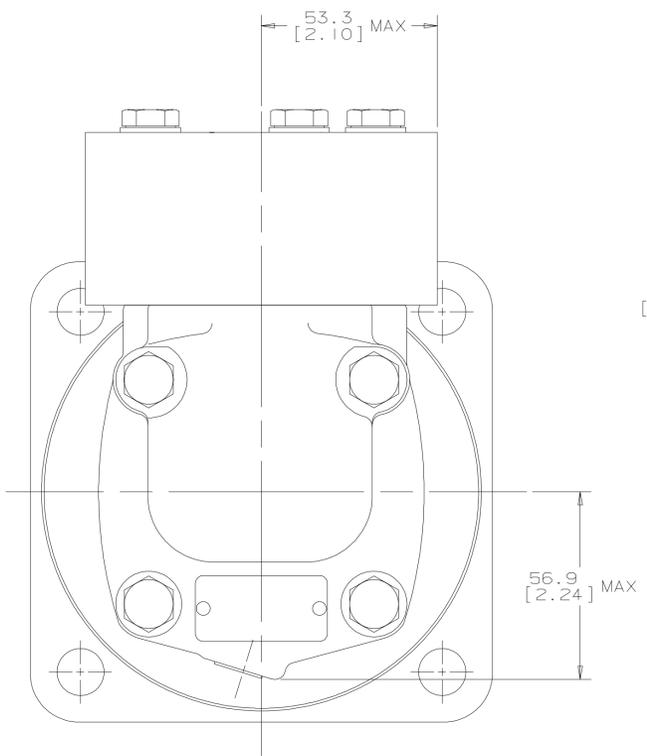


SYM	REVISION	BY	DATE	ECN
A	ENGINEERING RELEASE	RCB	1/7/98	M18925
B	REVISED PICTORALLY	RCB	3/27/98	M18925A
C	-1) (4B) ADDED Ø 93.0/91.4 [3.66/3.60] -2) (4C) ADDED 21.6 [.85] MAX -3) REVISED PICTORALLY	JMS	7-29-99	33164
D	-1) (4B) REMOVED Ø 93.0/91.4 [3.66/3.60] -2) REVISED PICTORALLY -3) (4B) ADDED Ø 96.0/94.5 [3.78/3.72]	MLL	11-20-00	36676
E	(4A) NOTE 2 WAS MOUNTING TYPE: B	AGJ	5/13/02	41044
F	-1) (4C) REMOVED 96.0/94.5 [3.78/3.72] -2) (4C) REMOVED 21.6 [.85] MAX	AAK	3-2-04	46977

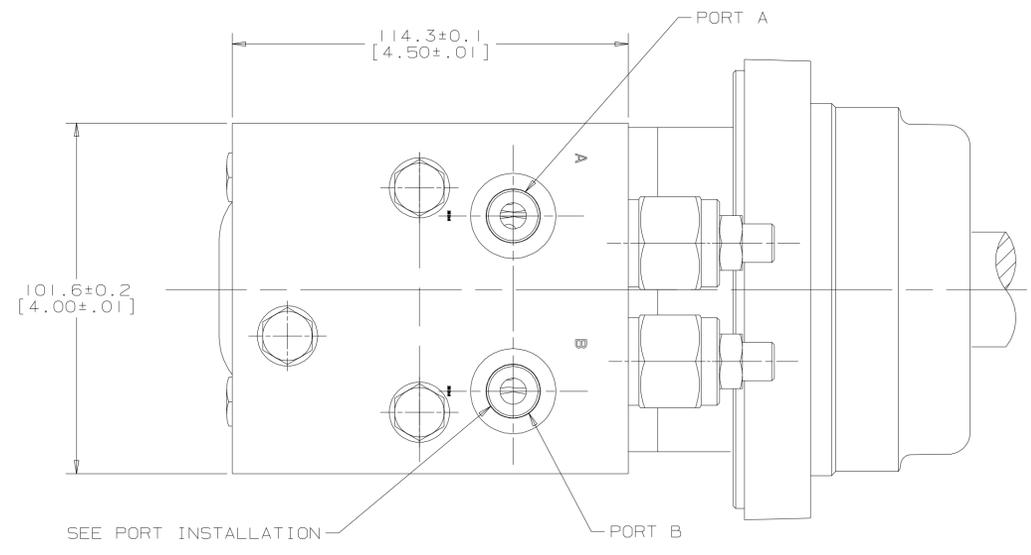

NOTE

1 ROTATION:
 STANDARD: WHEN FACING SHAFT END OF MOTOR, SHAFT TO ROTATE;
 CLOCKWISE WHEN PORT "A" IS PRESSURIZED
 COUNTERCLOCKWISE WHEN PORT "B" IS PRESSURIZED
 REVERSE: WHEN FACING SHAFT END OF MOTOR, SHAFT TO ROTATE;
 CLOCKWISE WHEN PORT "B" IS PRESSURIZED
 COUNTERCLOCKWISE WHEN PORT "A" IS PRESSURIZED

2 MOUNTING TYPE: AB
 WHEEL, 4 BOLT: Ø 108.0 [4.25] PILOT
 Ø 13.59 [.535] HOLES ON Ø 147.6 [5.81] BOLT CIRCLE
 Ø 127.0 [5.00] REAR MOUNT PILOT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN		DRAWING BASED ON ANSI Y14.5M-1982	
INCHES <input type="checkbox"/>	MILLIMETERS <input checked="" type="checkbox"/>	THE REPRODUCTION, DISTRIBUTION, AND UTILIZATION OF THIS DOCUMENT, AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPLICIT AUTHORIZATION IS PROHIBITED. OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHTS RESERVED IN THE EVENT OF THE GRANT OF A PATENT, UTILITY MODEL, OR DESIGN. (PER ISO 16016)	
TOLERANCES			
.XX ± REF	DRWN BY/DATE R. BERGERSON 1/7/98	MATERIAL/HEAT TREAT	
.XXX ± ONLY	CHECKED BY/DATE R. FLOR 1/23/98		
UNSPECIFIED RADI ARE	ENGRD BY/DATE J. MILLAR 1/23/98	TITLE	
UNSPECIFIED DRAFT ANGLES ARE	METALLURGY BY/DATE	2000 SERIES MOTOR INSTALL	
DRAWING FORMAT CAD <input checked="" type="checkbox"/> MANUAL <input type="checkbox"/>	THIRD ANGLE PROJECTION	MICROINCHES (MICROINCHES)	NUMBER
	DO NOT SCALE	ARTHMETICAL AVERAGE	A-664-026
		SCALE 1/1	SHEET 1 OF 1

G K S